


SPECIFICATIONS:

- SPACE SAVER RECESSED VALVE BOX WITH 1/2" ANGLE STOP WITH 1/4" COMPRESSION CONNECTION.
- G90 HOT DIPPED GALVANIZED STEEL BOX. PAINT AS DIRECTED BY ARCHITECT.
- BOTTOM OF BOX 6"-12" AFF.

DETAIL BASED ON GUY GRAY

MARK	DESCRIPTION	TRAP	PIPE SIZES				MOUNTING
			HW	CW	WP	VP	
P-9	METAL ICE MAKER WALL BOX	-	-	1/2"	-	-	WALL

METAL ICE MAKER WALL BOX

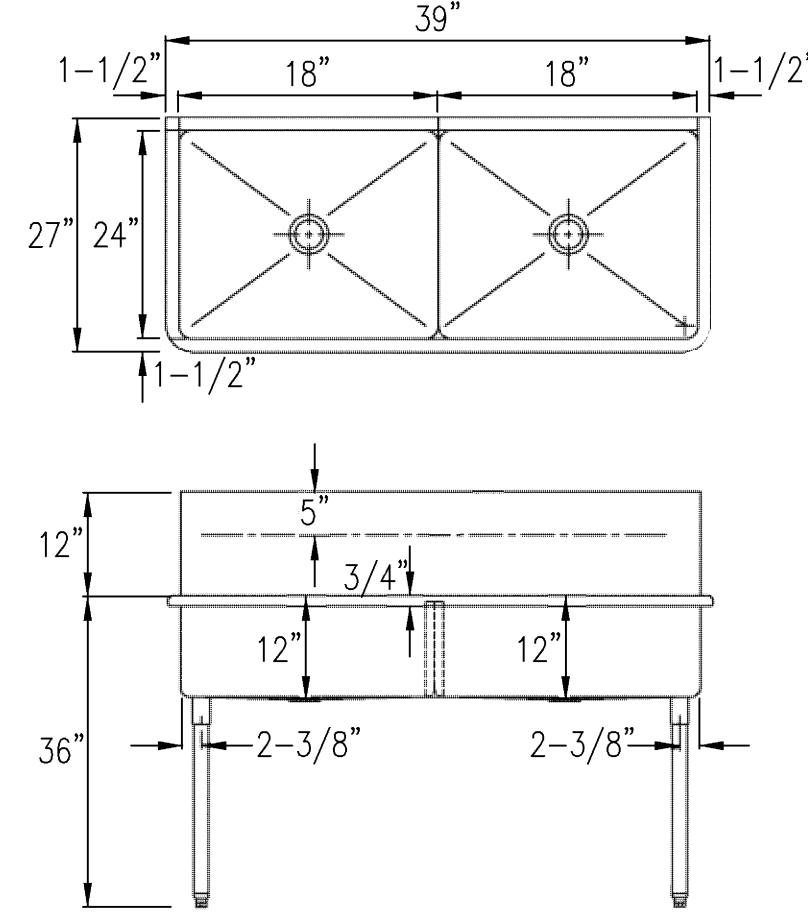


SPECIFICATIONS:

- CONSTRUCTED OF 14 GAUGE TYPE 304, 18-8 STAINLESS STEEL. INTERIOR SURFACE POLISHED WITH A NON-POROUS HAND-BLENDED JUST FINISH. EXPOSED EXTERIOR SURFACES TO HAVE A BRUSH FINISH. SUPPORTED ON (4) 16 GAUGE 1 5/8" O.D. STAINLESS STEEL TUBULAR LEGS WITH STAINLESS STEEL FULLY ENCLOSED GUSSETS AND ADJUSTABLE BULLET FEET. DRAIN PUNCH #35 CENTERED FOR JUST J-35 UNLESS OTHERWISE SPECIFIED. CERTIFIED TO ANSI/NSF STANDARD 2. WITH (2) HOLES ON 6" CENTERS OF EACH COMPARTMENT.
- PROVIDE WATER SAVER PR1711-110WS WITH L110 VACUUM BREAKER.
- PROVIDE 2"x2" FURNITURE CASTERS UNDER SINK LEGS TO PROTECT FLOOR.

DESIGN BASED ON JUST NSF8-236

MARK	DESCRIPTION	TRAP	PIPE SIZES				MOUNTING
			HW	CW	WP	VP	
P-10	TWO COMPARTMENT SINK	2"	3/4"	3/4"	2"	2"	FLOOR

TWO COMPARTMENT SINK

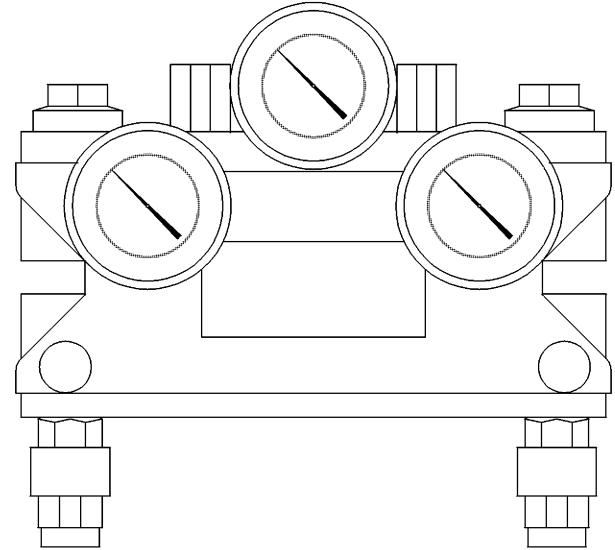


SPECIFICATIONS:

- THERMOSTATIC MIXING VALVE THAT MIXES HOT AND COLD WATER TO SUPPLY TEMPERED WATER TO ONE OR MORE EMERGENCY DRENCH SHOWERS AND EYEWASH FIXTURES REQUIRING FLOW UP TO 40 GPM. UNIT IS CONSTRUCTED OF BRONZE, BRASS, COPPER, AND STAINLESS STEEL. LIQUID THERMAL THERMOSTATS WITH TAMPER-RESISTANT CONTROL ADJUSTMENT. SYSTEM SHUTS OFF ALL INCOMING HOT WATER AND COLD WATER SUPPLY FAIL. REDUNDANT THERMOSTATIC ELEMENTS PROVIDE TEMPERING EVEN WHEN ONE ELEMENT FAILS. SHOULD THE HOT WATER SUPPLY BECOME INTERRUPTED, OR THE THERMOSTATIC ELEMENTS FAIL, THE VALVE WILL GO INTO COLD-WATER BYPASS FLOW. MAXIMUM INLET PRESSURE: 125 PSIG. MAXIMUM INLET TEMPERATURE: 180° (82°C). MINIMUM INLET TEMPERATURE: 120°F (49°C).
- PROVIDE WATER SAVER TMV AP3800 THERMOSTATIC MIXING VALVE OR EQUIVALENT.

MARK	DESCRIPTION	TRAP	PIPE SIZES				MOUNTING
			HW	CW	WP	VP	
P-11	EMERGENCY EYE-WASH SHOWER	-	1"	1"	-	-	FLOOR

TEMPERED WATER-BLENDING SYSTEM

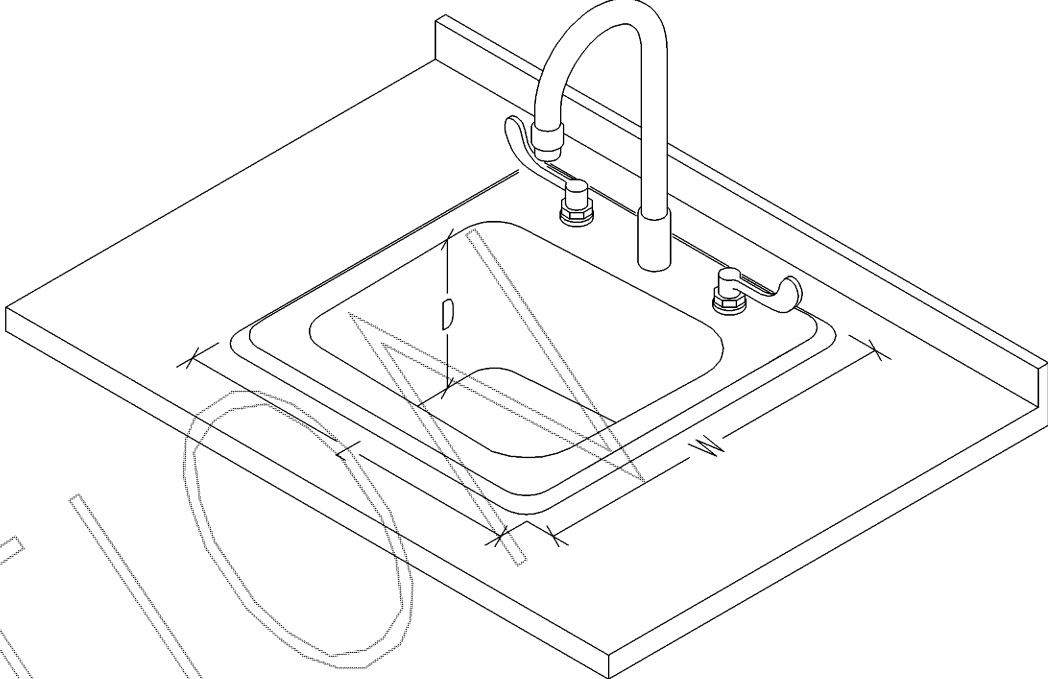

SPECIFICATIONS:

- SEAMLESS DIE DRAWN 18 GAUGE STAINLESS STEEL SINK WITH EXPOSED SURFACE POLISHED TO A NON-POROUS FINISH. FULLY COATED UNDERSIDE INSULATED FOR SOUND AND CONDENSATE.
- 8" CENTER, TWO HANDLE BELOW DECKMOUNT FAUCET, POLISHED CHROME PLATED FINISH TRIM, CAST BRASS BODIES, BRASS SPOUT AND TRIM, HEAVY DUTY RIGID/SWIVEL GOOSENECK SPOUT, STANDARD 2.2 GPM FLOW CONTROL AERATOR, 4" BLADE HANDLES, COLOR INDEX METAL HANDLES WITH VANDAL RESISTANT SCREWS, AS MANUFACTURED BY CAMBRIDGE BRASS.
- CHROME FINISH CAST BRASS LOOSE KEY ANGLE STOPS WITH CHROME FINISH RIGID SUPPLY RISERS. OFFSET GRID STRAINER AND ADJUSTABLE "P"-TRAP.
- PROVIDE 1/2" x 3/8" COMPRESSION COLD WATER STOP VALVE IN CABINET FOR COFFEE MAKER. PROVIDE BACKFLOW DEVICE FOR USE WITH BEVERAGE DISPENSER.

DETAIL BASED ON ELKAY, MODEL # LRAD1720

MARK	DESCRIPTION	TRAP	PIPE SIZES				MOUNTING
			HW	CW	WP	VP	
P-12	20"Wx17"Lx6-1/2"D	"P"-TRAP	1/2"	1/2"	2"	1-1/2"	COUNTER TOP

SINK

NOT FOR PRICING OR